

Precise · Fast  
Inexpensive

www.schneckenfluegel.de



Company

Date

Contact


Street

Country / Postcode / Town


Phone

Fax

Email

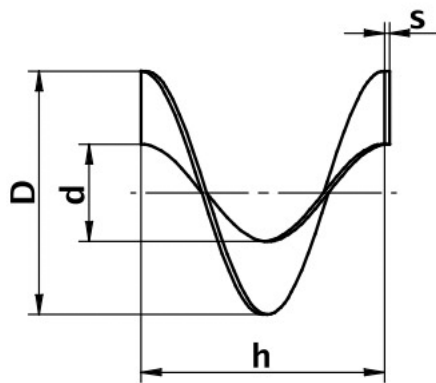

right-hand thread

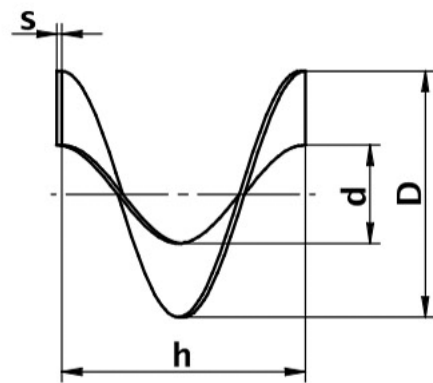

left-hand thread

Quantity:				
Outside diameter: D (mm)				
Pitch: h (mm)				
Inside diameter: d (mm)				
Material thickness: s (mm)				
Anticlockwise direction:				
Clockwise direction:				
Material:				

**Materials, e.g.:** (Other material qualities and alloys on request)

**Structural steel**

- S235JR (1.0037, St. 37-2)
- S355J2+N (1.0570, St. 52-3)

**Stainless steel**

- 1.4301/1.4307 (AISI 304/304L)
- 1.4541
- 1.4401/1.4404 (AISI 316/316L)
- 1.4571

**Duplex steel**

- 1.4462

**Creep-resistant steel**

- 16Mo3 (1.5415)
- P265GH (1.0425, boiler plate H11)

**Heat-resistant steel**

- 1.4828
- 1.4841

**Wear-resistant and creep-resistant steel**

- Creusabro 4800 (CR4800)
- Creusabro 8000 (CR8000)

**Wear-resistant steel**

- RAEX AR 400
- XAR 400
- HARDOX 400
- X120Mn12 (1.3401, manganese)

**Surface qualities:**

- Hot-rolled or cold-rolled
- Pickled
- Matt blasted
- Ground
- Electropolished

**SEND**

PLEASE SUBMIT ADDITIONAL INFORMATION ON PAGE 2

E-Mail: bernd.brunken@schneckenfluegel.de · Fax: +49 4405 23837-10

